


PRACHT®

COMO SERIES

LED HIGHBAY PROGRAM

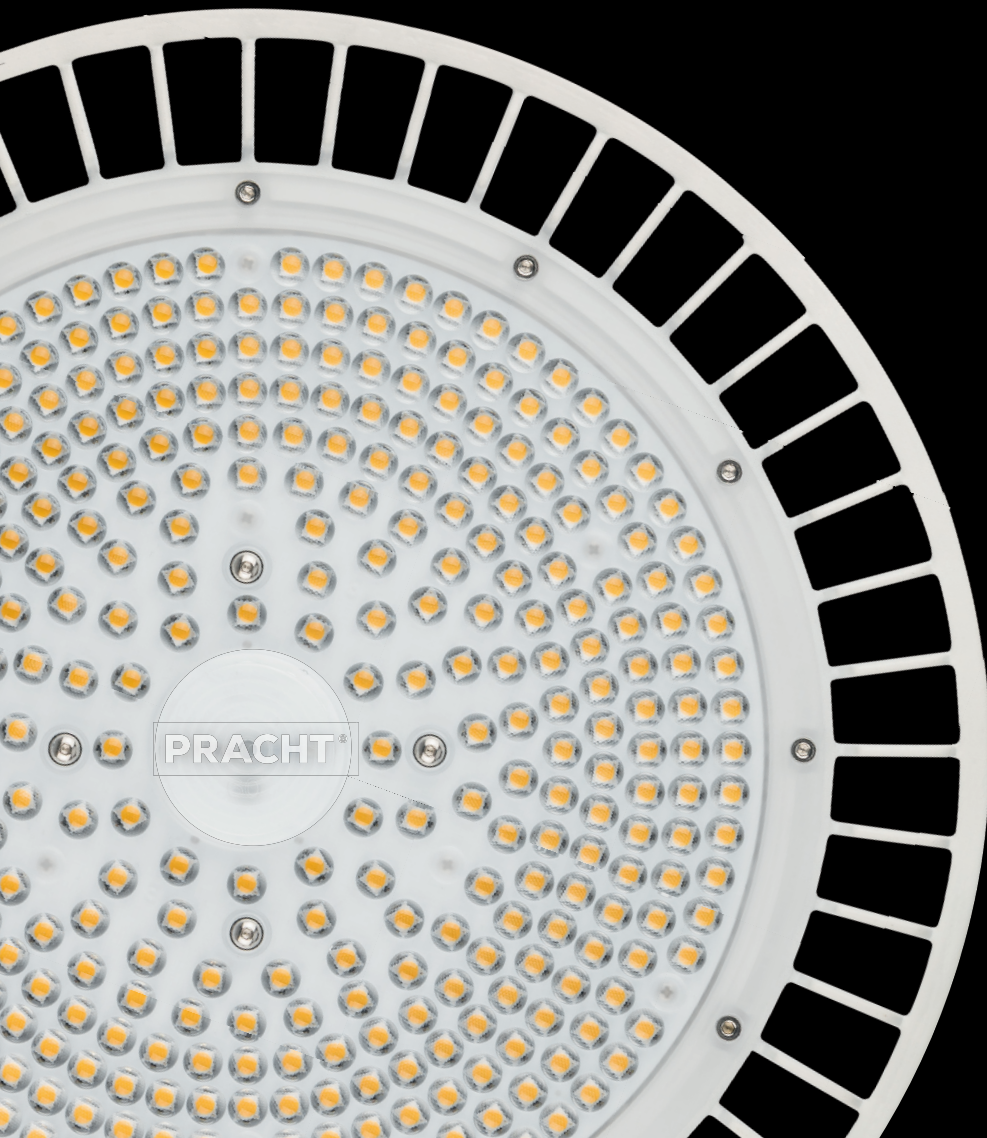

PRACHT®

LOGISTICS

PRODUCTION

SMART FACTORY

PRACHT®

SMART FACTORY FOR

NEXT LEVEL HIGHBAY. HIGHBAY WITH SMART FACTORY INTERFACE.

„In the field of industrial lighting, PRACHT's COMO has long been established.“ Not only for Highbays. The Highbay became known and popular due to its easy installation, robust construction and very good lighting technology.

SMART FACTORY for all.

New: All COMO BL with future-proof CASAMBI interface.*



COMO SERIES



The pluggable way to the

White powder coated
aluminum magnesium alloy



Plenty of light - no glare.
Lowest UGR value

D-marking, ENEC and IP65 thanks to robust
construction and short, age-resistant

ALL

The new PRACT COMO BL together with the PRACT CONNECT module allows the quick and simple change of an existing 3-wire cabling into a smart future-proof factory without any rewiring. And that for the price of an on/off spotlight. The modular design of the spotlight and the plug-in module allow the extension to this technological advance at a later date. The result: You can install a decentralized lighting control via CASAMBI with neither additional wiring nor the need of a central control unit. A manufacturer independent, future-proof system for dimming, controlling (daylight, corridor, scenes, time, etc.) with integration of wireless pushbuttons and remote access. Future-proof at no extra cost!

Dive into the CASAMBI world with PRACT now.
Future-proof at no extra cost.

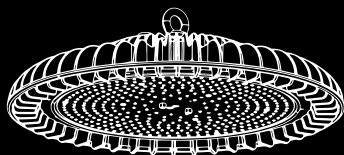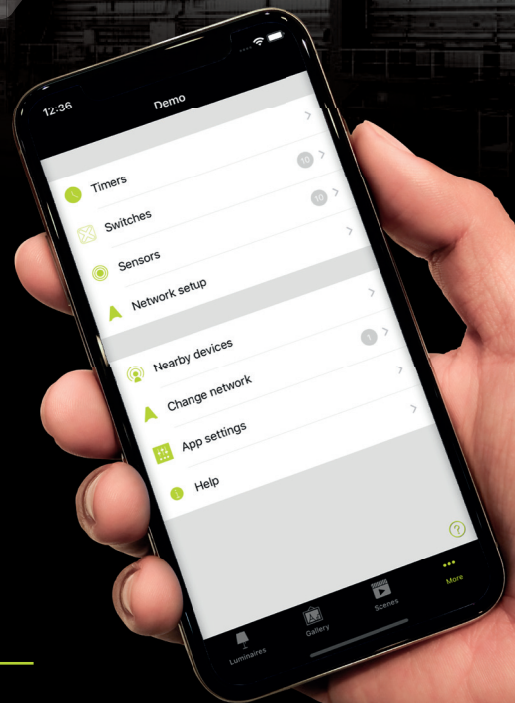

With different covers, lenses,



Tender texts on
[PRACT.COM/SERVICECENTER](https://pracht.com/servicecenter)



Free light planning

PRACHT®

COMO BL

The COMO BL from the PRACHT BASIC LINE is a quickly available, robust and cost-effective solution for lighting halls with high ceilings.

PRACHT quality with the price-performance winner COMO BL - now with future-proof CASAMBI interface. The fast entry to the SMART FACTORY!



COMO BL Polycarbonate cover, color temperature 4000 K, diameter 380 mm, $R_a > 80$, IP65, Ta -40°C ... +50°C, ON/OFF CASAMBI READY*

| Model | P/N | Power | Optics | Light distribution | Weight |
|-------------|---------|---------|------------|--------------------|--------|
| COMO BL 100 | 9600012 | 1x90 W | 100° wide | 13600 lm | 2,4 kg |
| COMO BL 150 | 9612212 | 1x135 W | 100° wide | 20500 lm | 3,9 kg |
| COMO BL 150 | 9602212 | 1x135 W | 60° medium | 20500 lm | 3,9 kg |
| COMO BL 200 | 9612112 | 1x180 W | 100° wide | 27000 lm | 4,0 kg |
| COMO BL 200 | 9602112 | 1x180 W | 60° medium | 27000 lm | 4,0 kg |

ACCESSORIES

| Model | P/N | Description |
|-----------------------------|---------|------------------------------------------------------------------|
| COMO BL 100 bracket | 9600009 | Wall and ceiling mounting bracket white COMO BL 100 |
| COMO BL/PRO 150/200 bracket | 9600019 | Wall and ceiling mounting bracket white COMO BL/PRO 150/200 |
| PRACHT CONNECT MODULE | 9602009 | Plug-in module for all COMO BL* for subsequent CASAMBI extension |

DISCOVER THE CASAMBI WORLD

Industrial sensors, control units and accessories are available in the PRACHT CASAMBI world under www.pracht.com/casambi

CASAMBI



Protection class I
Protection type IP65
Dustproof, 220-240 V 50/60 Hz

*except COMO BL 100



FIND MORE
INFO HERE



LIVE LINK
VIDEO
SUPPORT

CASAMBI READY

PRACHT CONNECTMODULE CASAMBI

CASAMBI WORLD Discover a wide range of control, sensing and connectivity options!

| | Description | P/N |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| IN-WALL SWITCH MODULE  | XLS CC SWITCH The SWITCH is an extension of a traditional wall switch. The switch is integrated into the flush-mounted box and wired in series. Predefined scenes can now be activated or deactivated via ON/OFF. The app is only necessary for initial programming. | 9800002 |
| SURFACE-MOUNTED PUSHBUTTON (4X)  | XLS CC CONTROLLER The CONTROLLER is a wireless push button user interface that can be freely configured with the Casambi App. The controller with its 4 definable buttons allows to operate preconfigured scenes, animations, single lights, groups of lights or everything simultaneously. It also has 4 predefined buttons for dimming and light color change. The app is only necessary for initial programming. | 9800003 |
| DAYLIGHT-INDEPENDENT FOR AREAS WITH OBSTACLES SUCH AS PLANT AREAS  | XLS CCS HF (High-Frequency) The motion sensor with IP65 protection is designed for use in production halls. More suitable for areas with detection obstacles. It has a maximum installation height of 12 meters and can detect movements in diameter up to 6 meters. | 9800007 |
| ACQUISITION OF AISLES AND ASYMMETRIC AREAS  | XLS CCS ASYM The daylight and motion sensor (infrared) with IP66 protection is designed for use in corridors and passageways. It has a maximum installation height of 12 meters and can detect movements in diameter of up to 3 or 5 meters (asymmetrical). In the app, the daylight sensor can be combined with luminaire control | 9800004 |
| IDEAL FOR HIGH-BAY WAREHOUSES AND PRECISELY DEFINED SMALL AREAS  | XLS CCS HRO The daylight and motion sensor (infrared) with IP66 protection is designed for use in high-bay warehouses. It has a maximum installation height of 20 meters and can detect movements up to 5 meters in diameter. In the app, the daylight sensor can be combined with the luminaire control. | 9800005 |
| FOR PARTICULARLY LARGE ACQUISITION AREAS SUCH AS FACTORY HALLS  | XLS CCS HALL The daylight and motion sensor (infrared) with IP66 protection is designed for use in halls. Especially where large open spaces need to be monitored. It has a maximum installation height of 14 meters and can detect movements up to 28 meters in diameter. In the app, the daylight sensor can be combined with the luminaire control. | 9800006 |


5
YEAR
WARRANTY


50.000 h
LIFETIME

CASAMBI
READY

IP65

D




FROM TO -40 °C
+50 °C

COMO PRO

Do you like a little more? When standard applications demand more and the COMO BL is exhausted - then it is time for the COMO PRO, a configurable LED hall (Highbay???) spotlight. Optional with e.g. a plug, different light colors or two different covers, also with

special PMMA to ensure ammonia resistance for animal husbandry. With 5 year warranty for the PRACHT PRO LINE, ON/OFF spotlight with standard but also a future-proof CASAMBI interface the COMO is the best choice!

COMO PRO Polycarbonate cover, color temperature 4000 K, diameter 380 mm, R_a>80, IP65, Ta -40°C ... +50°C, ON/OFF CASAMBI READY

| | Model | P/N | Power | Optics | Light distribution | Weight |
|----------|--------------|-------------------------------------------------------------------------------------------------------|---------|------------|--------------------|--------|
| ON/OFF | COMO PRO 150 | 96022121 | 1x150 W | wide 100° | 20500 lm | 3,9 kg |
| | COMO PRO 200 | 96021121 | 1x200 W | wide 100° | 27000 lm | 4,0 kg |
| | COMO PRO 150 | 96122121 | 1x150 W | medium 60° | 20500 lm | 3,9 kg |
| | COMO PRO 200 | 96121121 | 1x200 W | medium 60° | 27000 lm | 4,0 kg |
| DIM-DALI | COMO PRO 150 | 96062121  48H | 1x150 W | wide 100° | 20500 lm | 3,9 kg |
| | COMO PRO 200 | 96061121  48H | 1x200 W | wide 100° | 27000 lm | 4,0 kg |
| | COMO PRO 150 | 96172121 | 1x150 W | medium 60° | 20500 lm | 3,9 kg |
| | COMO PRO 200 | 96171121 | 1x200 W | medium 60° | 27000 lm | 4,0 kg |
| | COMO PRO 200 | 96176121 | 1x200 W | medium 60° | 32000 lm | 3,9 kg |
| | COMO PRO 200 | 96076121 | 1x200 W | wide 100° | 32000 lm | 4,0 kg |

COMO PRO Abdeckung PMMA, Farbtemperatur 4000 K, Durchmesser 380 mm, Ra>80, IP65, Ta -40°C ... +50°C, ON/OFF CASAMBI READY

| | Model | P/N | Power | Optics | Light distribution | Weight |
|----------|--------------|----------|---------|------------|--------------------|--------|
| ON/OFF | COMO PRO 150 | 96022221 | 1x150 W | wide 100° | 20500 lm | 3,9 kg |
| | COMO PRO 200 | 96021221 | 1x200 W | wide 100° | 27000 lm | 4,0 kg |
| | COMO PRO 150 | 96122221 | 1x150 W | medium 60° | 20500 lm | 3,9 kg |
| | COMO PRO 200 | 96121221 | 1x200 W | medium 60° | 27000 lm | 4,0 kg |
| DIM-DALI | COMO PRO 150 | 96072221 | 1x150 W | wide 100° | 20500 lm | 3,9 kg |
| | COMO PRO 200 | 96071221 | 1x200 W | wide 100° | 27000 lm | 4,0 kg |
| | COMO PRO 150 | 96172221 | 1x150 W | medium 60° | 20500 lm | 3,9 kg |
| | COMO PRO 200 | 96171221 | 1x200 W | medium 60° | 27000 lm | 4,0 kg |
| | COMO PRO 200 | 96176221 | 1x200 W | medium 60° | 32000 lm | 3,9 kg |
| | COMO PRO 200 | 96076221 | 1x200 W | wide 100° | 32000 lm | 4,0 kg |

ACCESSORIES

| Model | P/N | Description |
|---------------------------|---------|---------------------------------------------------------------------------|
| Bügel COMO BL/PRO 150/200 | 9600019 | Wall and ceiling mounting bracket white bracket COMO BL/PRO 150/200 |
| PRACHT CONNECT MODUL | 9602009 | Plug-in module for all On/Off - COMO PRO for subsequent CASAMBI expansion |

NOTE

OTHER LIGHT COLOURS (LF 830, 865) POSSIBLE.

Simply add LF code to the part number. Example: 1x150 W Wide 100° in 6500K: 96012221_865
For light color deviating from the standard, longer delivery times must be expected. Photometric data based on PRACHT LF 840.



DISCOVER THE CASAMBI WORLD

Industrial sensors, control units and accessories are available in the PRACHT CASAMBI world at www.pracht.com/casambi



Protection class I
Protection type IP65
Dustproof, 220-240V 50/60 Hz



LIVE LINK
VIDEO
SUPPORT

PRACHT®

5 YEARS WARRANTY
OTHER LIGHT COLORS ENEC
DIM DALI POLYCARBONATE COVER
CASAMBI PMMA COVER
INDIVIDUALISABLE PERFORMANCE

INDUSTRY-SPECIALIST



ROADRUNNER PROGRAM

**THE MARKED LIGHTS ARE AVAILABLE WITHIN
48H FOR DELIVERY. ALL ROADRUNNER PRODUCTS
AT WWW.PRACHT.COM/ROADRUNNER**

5

**YEAR
WARRANTY**



**100.000 h
LIFETIME**

**CASAMBI
READY**

IP65



**FROM -40°C
TO +50°C**

**„THERE WILL NEVER BE ANY COMPROMISE
IN THE QUALITY OF MY PRACHT LUMINAIRES.“**

Alfred Pracht, Founder, 1963

HESSENCHAMPION 2020 IN THE „INNOVATION“ CATEGORY

PRACHT was awarded the innovation and growth prize „Hessen Champions“ by the state of Hesse for outstanding achievements in the category „Innovation“. The search was on for innovative companies in Hesse that are world leaders in their industry.

The selection criterion was the size of the company, the above-average creation of new jobs in Hesse or the development of new products or production processes.

