


Article-No: 7086719  
Surface-mounted luminaires



**BERNINA F SKII DALI 1.3m  
PC 1x32W 090° 3400lm 940  
TW5x2,5+2x1,5 class II 4kVESB**

LED Luminaire in extremely flat construction with efficient MID-power LEDs, LED unit fully interchangeable, converter integrated in luminaire, flat, stable housing made of GFK-polyester, impact-resistant cover panel made of PRACHTOPAL, one man fitting possible with variable mounting points through PRACHT-CLIP-SYSTEM

GTIN 4018098353034  
Statistical product number 94054231

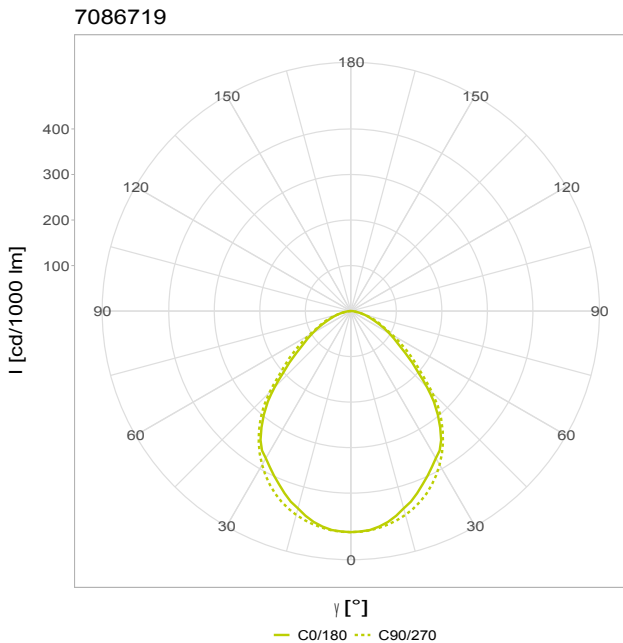

**DIMENSIONS AND WEIGHTS**

Length	1274 mm
Width	215 mm
Height	85 mm
Net weight	6,40 kg

**OUTPUT**

Luminous flux	3400 lm
Systempower	32 W
Efficacy	106 lm/W
Energy efficiency class of the light source	D

**ASSEMBLY AND MAINTENANCE**

Optional mounting type	horizontal Wall, vertical wall, Recessed
Standard mounting	Ceiling

**MATERIAL**

Cover material	PC - Polycarbonate
Housing material	GRP polyester
Housing colour	White RAL 9010

## LIGHT SOURCE

Luminaire type	LED
Number of light sources   LED rows   lamps	1
Colour temperature	4000 K
Colour rendering index	>90
Number of LEDs	192
Standard Deviation of Colour Matching (SDCM)	3
Control gear exchangeable	yes, by qualified person
Light source exchangeable	yes, by manufacturer

## LIGHTING ENGINEERING

Light distributor	Reflector
Light distribution angle	90 °
Light distribution	wide beam
Glare limitation UGR 4H 8H C0 C90	18 / 18

## CAPACITY

outdoor area	Protected outdoor area*
Rebuildable	false
IK-Impact resistance	IK08
Protection class (IP)	IP65
Use in animal husbandry	not suitable
Vandalism protection	false
Warranty	5 Years
Life expectancy B50 at 25° in hours (h)	
L90/B50 25°C	56231
L80/B50 25°C	>100000
L70/B50 25°C	>100000
Life expectancy B10 at 25° in hours (h)	
L80/B10 25°C	>100000
L70/B10 25°C	>100000
Life expectancy B50 at 45° in hours (h)	
L90/B50 45°C	52531
L80/B50 45°C	>100000
L70/B50 45°C	>100000
max. lowest temperature	-25 °C
max. highest temperature	45 °C

## TECHNICAL DATA

ENEC	true
Dimming type	Dimming DALI
Filament test	850 °C
Protection class	class II
Circuit Breaker B10A	37 Luminaires
Circuit Breaker B16A	59 Luminaires
Circuit Breaker C10A	54 Luminaires
Circuit Breaker C16A	87 Luminaires
Voltage spike protection U (L-N)	4,0 kV
Through-wiring mm <sup>2</sup>	5x2,5+2x1,5
D-marking	true
Voltage type acc. ETIM	AC/DC
IFS suitable	false
Emergency light suitability of the luminaire	Yes, with article number 7086719NZ
Rated voltage	220-240V 0/50/60 Hz

## PACKAGING

VPE 1	
Unit	Carton
Content quantity	1 Piece
Length	1,35 m
Width	0,22 m
Height	0,10 m
Weight	6,60 kg
VPE 2	
Unit	Pallet
Content quantity	36 Piece
Length	1,35 m
Width	0,80 m
Height	1,35 m
Weight	257,60 kg

## FURTHER PRODUCT INFORMATION

REACH-Info	false
REACH-Listdate	2024-01-23
Market labelling	CE
Product labelling	RoHS, WEEE, DB listed

\* Protected outdoor area:  
a canopy protects the luminaire of direct solar radiation. It is to be ensured that for mounting beneath the edge, the luminaire does not withstand heavy rainfall. Typically a height difference of 0,5 times the roof overhang compared to the luminaire should not be exceeded.

*The right of error and later technical developments is reserved. 15.08.2024*

Values may be extrapolated differently from TM21.

