

Article-No: 74833610


Recessed luminaires



TAUNUS SKII DALI 185 1.5m PC 1x24W A060° 3300lm 940 TW5x2,5+2x1,5 class II

LED luminaire for flush-mounted installation. With cover made of either polycarbonate (PC) or PRACHTOPAL (PO). Luminaire housing made of polyester, white.. With MID-power LEDs, converter integrated in luminaire, with short ageing-resistant silicone seals, suitable for ceiling mounting, recess frame for built-in optionally available. IK08.

GTIN 4018098355694
Statistical product number 94054231

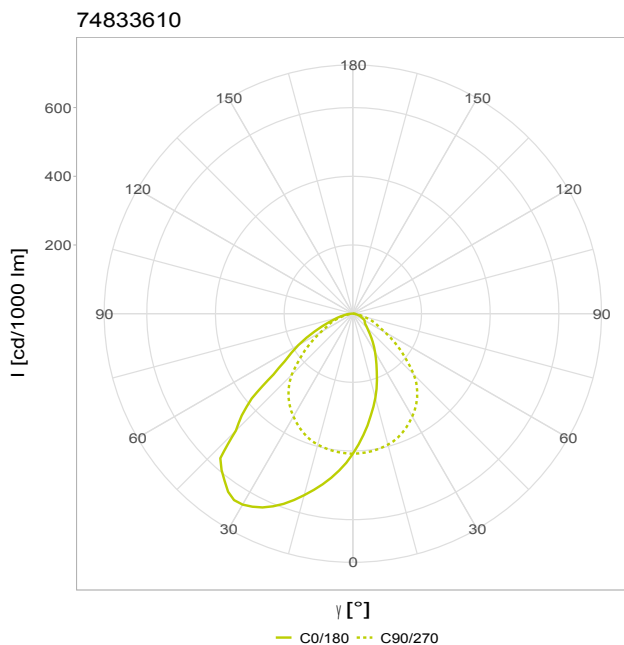

DIMENSIONS AND WEIGHTS

| | |
|------------|---------|
| Length | 1546 mm |
| Width | 192 mm |
| Height | 137 mm |
| Net weight | 4,80 kg |

ASSEMBLY AND MAINTENANCE

| | |
|------------------------|----------|
| Optional mounting type | Recessed |
| Standard mounting | Ceiling |

OUTPUT

| | |
|---|----------|
| Luminous flux | 3300 lm |
| Systempower | 24 W |
| Efficacy | 138 lm/W |
| Energy efficiency class of the light source | D |

MATERIAL

| | |
|------------------|--------------------|
| Cover material | PC - Polycarbonate |
| Housing material | GRP polyester |
| Housing colour | white |

LIGHT SOURCE

| | |
|--|--------------------------|
| Luminaire type | LED |
| Number of light sources LED rows lamps | 1 |
| Colour temperature | 4000 K |
| Colour rendering index | >90 |
| Number of LEDs | 240 |
| Standard Deviation of Colour Matching (SDCM) | 3 |
| Control gear exchangeable | yes, by qualified person |
| Light source exchangeable | not exchangeable |

LIGHTING ENGINEERING

| | |
|-----------------------------------|---------------------------|
| Light distributor | Diffuser lens/optic/panel |
| Light distribution angle | 60 ° |
| Light distribution | asymmetric |
| Glare limitation UGR 4H 8H C0 C90 | 18 / 12 |

CAPACITY

| | |
|---|-------------------------|
| outdoor area | Protected outdoor area* |
| Rebuildable | false |
| IK-Impact resistance | IK08 |
| Protection class (IP) | IP65 |
| Use in animal husbandry | not suitable |
| Vandalism protection | false |
| Warranty | 5 Years |
| Life expectancy B50 at 25° in hours (h) | |
| L90/B50 25°C | 56231 |
| L80/B50 25°C | >100000 |
| L70/B50 25°C | >100000 |
| Life expectancy B10 at 25° in hours (h) | |
| L80/B10 25°C | >100000 |
| L70/B10 25°C | >100000 |
| Life expectancy B50 at 35° in hours (h) | |
| L90/B50 35°C | 53938 |
| L80/B50 35°C | >100000 |
| L70/B50 35°C | >100000 |
| max. lowest temperature | -25 °C |
| max. highest temperature | 35 °C |

TECHNICAL DATA

| | |
|--|-------------------------------------|
| Dimming type | Dimming DALI Dimming DALI-2 |
| Filament test | 650 °C |
| Protection class | class II |
| Circuit Breaker B10A | 22 Luminaires |
| Circuit Breaker B16A | 36 Luminaires |
| Circuit Breaker C10A | 37 Luminaires |
| Circuit Breaker C16A | 61 Luminaires |
| Voltage spike protection U (L-PE) | 2,0 kV |
| Voltage spike protection U (L-N) | 1,0 kV |
| Through-wiring mm ² | 5x2,5+2x1,5 |
| D-marking | true |
| Voltage type acc. ETIM | AC/DC |
| IFS suitable | false |
| Emergency light suitability of the luminaire | Yes, with article number 74833610NZ |
| Rated voltage | 220–240V 0/50/60 Hz |

PACKAGING

| | |
|------------------|-----------|
| VPE 1 | |
| Unit | Carton |
| Content quantity | 1 Piece |
| Length | 1,64 m |
| Width | 0,20 m |
| Height | 0,17 m |
| Weight | 5,10 kg |
| VPE 2 | |
| Unit | Pallet |
| Content quantity | 28 Piece |
| Length | 1,65 m |
| Width | 0,80 m |
| Height | 1,30 m |
| Weight | 162,80 kg |

FURTHER PRODUCT INFORMATION

| | |
|-------------------|------------|
| REACH-Info | false |
| REACH-Listdate | 2024-01-23 |
| Market labelling | CE |
| Product labelling | RoHS, WEEE |

* Protected outdoor area:

a canopy protects the luminaire of direct solar radiation. It is to be ensured that for mounting beneath the edge, the luminaire does not withstand heavy rainfall. Typically a height difference of 0,5 times the roof overhang compared to the luminaire should not be exceeded.

The right of error and later technical developments is reserved. 15.08.2024

Values may be extrapolated differently from TM21.

