

Article-No: 9481035d

Reflector luminaire




## APOLLO G2 1.6m PM 1x36W 030° 6000lm 840 TW5x2,5 class I

New generation of the proven APOLLO damp-proof reflector luminaire. Elegant socket end pieces made of newly designed PBT. Easy one-man installation of the reflector through integrated plug-in device with directional guides and captive, easy-to-close clips made of stainless steel. All-round closed housing made of white, glass fiber reinforced, flame-retardant, largely acid and alkali-resistant polyester resin, protection class IP65. Reflector swivels 120°, with practical locking in 10° steps. Short, aging-resistant silicone seals. Integrated electronic converter. Particularly robust due to thermal decoupling of LED and converter. Through-wiring up to max. 5x2.5mm<sup>2</sup> + 2x1.5mm<sup>2</sup> possible. The permissible ambient temperature decreases by 1°C for every 2A load of the through-wiring. Variable mounting distances through PRACHT-CLAMP-SYSTEM made of stainless steel, suitable for ceiling and horizontal wall mounting, pendant and rail mounting with accessories possible.

GTIN 4018098420040

Statistical product number 94054231

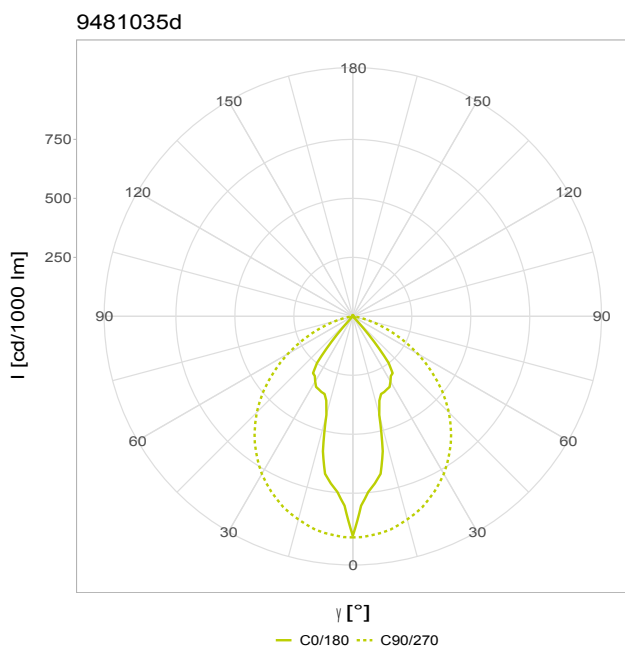

## DIMENSIONS AND WEIGHTS

|            |         |
|------------|---------|
| Length     | 1560 mm |
| Width      | 105 mm  |
| Height     | 152 mm  |
| Net weight | 3,10 kg |

## OUTPUT

|   |          |
|---|----------|
| Luminous flux                               | 6000 lm  |
| Systempower                                 | 36 W     |
| Efficacy                                    | 167 lm/W |
| Energy efficiency class of the light source | C        |

## ASSEMBLY AND MAINTENANCE

|                        |   |
|------------------------|---|
| Optional mounting type | Pendulum mounting,<br>mounting rail,<br>horizontal Wall |
| Standard mounting      | Ceiling   |

## LIGHT SOURCE

|   |                          |
|---|--------------------------|
| Luminaire type                                  | LED                      |
| Number of light sources  <br>LED rows   lamps   | 1                        |
| Colour temperature                              | 4000 K                   |
| Colour rendering index                          | >80                      |
| Number of LEDs                                  | 180                      |
| Standard Deviation of<br>Colour Matching (SDCM) | 3                        |
| Control gear<br>exchangeable                    | yes, by qualified person |
| Light source<br>exchangeable                    | yes, by manufacturer     |

## LIGHTING ENGINEERING

|                                      |                           |
|--------------------------------------|---------------------------|
| Light distributor                    | with swivelling reflector |
| Light distribution angle             | 30 °                      |
| Light distribution                   | narrow beam               |
| Glare limitation<br>UGR 4H 8H C0 C90 | 24 / 12                   |

## MATERIAL

|                  |                               |
|------------------|-------------------------------|
| Cover material   | PM -<br>Polymethylmethacrylat |
| Housing material | GRP polyester                 |
| Housing colour   | White RAL 9010                |

## CAPACITY

|   |                         |
|---|-------------------------|
| outdoor area                            | Protected outdoor area* |
| Rebuildable                             | false                   |
| IK-Impact resistance                    | IK06                    |
| Protection class (IP)                   | IP65                    |
| Use in animal husbandry                 | with limitation         |
| Vandalism protection                    | false                   |
| Warranty                                | 5 Years                 |
| Life expectancy B50 at 25° in hours (h) |                         |
| L90/B50 25°C                            | 73730                   |
| L80/B50 25°C                            | >100000                 |
| L70/B50 25°C                            | >100000                 |
| Life expectancy B10 at 25° in hours (h) |                         |
| L90/B10 25°C                            | 59851                   |
| L80/B10 25°C                            | >100000                 |
| L70/B10 25°C                            | >100000                 |
| Life expectancy B50 at 45° in hours (h) |                         |
| L90/B50 45°C                            | 68190                   |
| L80/B50 45°C                            | >100000                 |
| L70/B50 45°C                            | >100000                 |
| max. lowest temperature                 | -20 °C                  |
| max. highest temperature                | 45 °C                   |

## TECHNICAL DATA

|  |                                     |
|--|-------------------------------------|
| ENECEC                                       | true                                |
| Dimming type                                 | No dim function                     |
| Filament test                                | 650 °C                              |
| Protection class                             | class I                             |
| Circuit Breaker B10A                         | 17 Luminaires                       |
| Circuit Breaker B16A                         | 27 Luminaires                       |
| Circuit Breaker C10A                         | 28 Luminaires                       |
| Circuit Breaker C16A                         | 45 Luminaires                       |
| Voltage spike protection U (L-PE)            | 2,0 kV                              |
| Voltage spike protection U (L-N)             | 1,0 kV                              |
| Through-wiring mm <sup>2</sup>               | 5x2,5                               |
| D-marking                                    | true                                |
| Voltage type acc. ETIM                       | AC/DC                               |
| IFS suitable                                 | true                                |
| Emergency light suitability of the luminaire | Yes, with article number 9481035dNZ |
| Rated voltage                                | 220-240V 0/50/60 Hz                 |

The right of error and later technical developments is reserved. 15.08.2024

Values may be extrapolated differently from TM21.



## PACKAGING

|                  |           |
|------------------|-----------|
| VPE 1            |           |
| Unit             | Carton    |
| Content quantity | 1 Piece   |
| Length           | 1,60 m    |
| Width            | 0,12 m    |
| Height           | 1,16 m    |
| Weight           | 3,70 kg   |
| VPE 2            |           |
| Unit             | Pallet    |
| Content quantity | 42 Piece  |
| Length           | 1,70 m    |
| Width            | 0,80 m    |
| Height           | 1,30 m    |
| Weight           | 176,00 kg |

## FURTHER PRODUCT INFORMATION

|                   |            |
|-------------------|------------|
| REACH-Info        | false      |
| REACH-Listdate    | 2024-01-23 |
| Market labelling  | CE         |
| Product labelling | RoHS, WEEE |

\* Protected outdoor area:

a canopy protects the luminaire of direct solar radiation. It is to be ensured that for mounting beneath the edge, the luminaire does not withstand heavy rainfall. Typically a height difference of 0,5 times the roof overhang compared to the luminaire should not be exceeded.