


Article-No: 7404034


Recessed luminaires

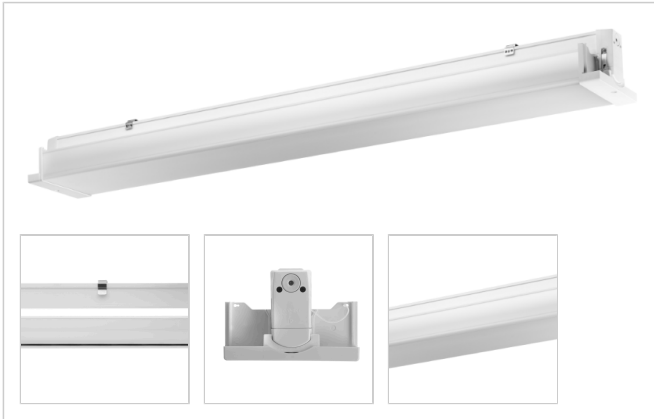

## TAUNUS N LED 185 1.2m PO 1x33W A075° 4600lm 840 TWwithout class II

LED luminaire for flush-mounted installation. With cover made of PRACHTOPAL (PO) and housing made of white GFK-polyester. With MID-power LEDs, converter integrated in luminaire, with short ageing-resistant silicone seals, suitable for ceiling mounting, recess frame for built-in optionally available. IK06.

GTIN 4018098295129  
Statistical product number 94054231

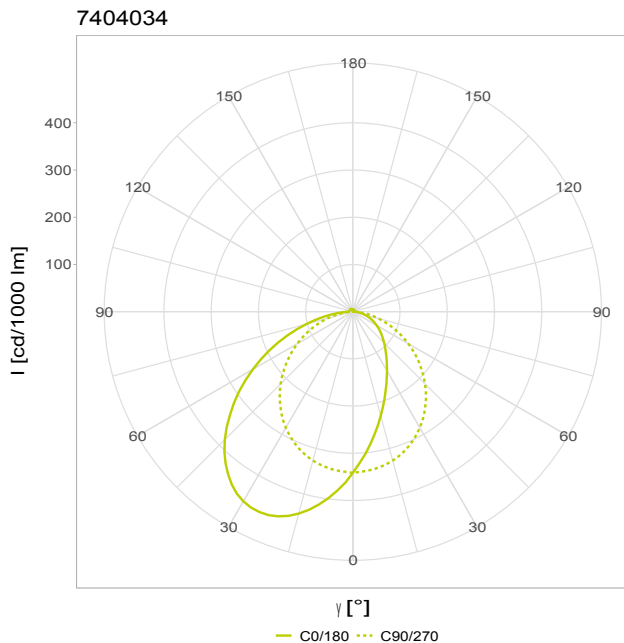

### DIMENSIONS AND WEIGHTS

Length	1246 mm
Width	192 mm
Height	137 mm
Net weight	4,20 kg

### ASSEMBLY AND MAINTENANCE

Optional mounting type	Recessed
Standard mounting	Ceiling

### OUTPUT

Luminous flux	4600 lm
Systempower	33 W
Efficacy	139 lm/W
Energy efficiency class of the light source	C

### MATERIAL

Cover material	PO - PRACHTOPAL
Housing material	GRP polyester
Housing colour	white

## LIGHT SOURCE

Luminaire type	LED
Number of light sources   LED rows   lamps	1
Colour temperature	4000 K
Colour rendering index	>80
Number of LEDs	96
Standard Deviation of Colour Matching (SDCM)	3
Control gear exchangeable	yes, by qualified person
Light source exchangeable	yes, by manufacturer

## LIGHTING ENGINEERING

Light distributor	Diffuser lens/optic/panel
Light distribution angle	75 °
Light distribution	asymmetric beam
Glare limitation UGR 4H 8H C0 C90	22 / 17

## CAPACITY

outdoor area	Protected outdoor area*
Rebuildable	false
IK-Impact resistance	IK06
Protection class (IP)	IP65
Use in animal husbandry	not suitable
Vandalism protection	false
Warranty	5 Years
Life expectancy B50 at 25° in hours (h)	
L90/B50 25°C	73730
L80/B50 25°C	>100000
L70/B50 25°C	>100000
Life expectancy B10 at 25° in hours (h)	
L90/B10 25°C	59851
L80/B10 25°C	>100000
L70/B10 25°C	>100000
Life expectancy B50 at 35° in hours (h)	
L90/B50 35°C	68190
L80/B50 35°C	>100000
L70/B50 35°C	>100000
max. lowest temperature	-20 °C
max. highest temperature	35 °C

## TECHNICAL DATA

Dimming type	No dim function
Filament test	650 °C
Protection class	class II
Circuit Breaker B10A	10 Luminaires
Circuit Breaker B16A	16 Luminaires
Circuit Breaker C10A	16 Luminaires
Circuit Breaker C16A	26 Luminaires
Voltage spike protection U (L-PE)	2,0 kV
Voltage spike protection U (L-N)	1,0 kV
Through-wiring mm <sup>2</sup>	without
D-marking	true
Voltage type acc. ETIM	AC/DC
IFS suitable	false
Emergency light suitable (EL)	true
Rated voltage	220-240V 0/50/60 Hz

## PACKAGING

VPE 1	
Unit	Carton
Content quantity	1 Piece
Length	1,34 m
Width	0,20 m
Height	0,17 m
Weight	4,50 kg
VPE 2	
Unit	Pallet
Content quantity	28 Piece
Length	1,65 m
Width	0,80 m
Height	1,30 m
Weight	146,00 kg

## FURTHER PRODUCT INFORMATION

REACH-Listdate	2024-01-23
Market labelling	CE
Product labelling	RoHS, WEEE

## Accessories (optional)

---

Article-No:	Designation
0619031	Ceiling recessed frame TAUNUS N LED 185/4 ceiling section L:1272mm W:215mm
0619132	Panel ceiling recessed frame TAUNUS N LED 185/4 Total L:1500mm L:275mm

\* Protected outdoor area:  
a canopy protects the luminaire of direct solar radiation.  
It is to be ensured that for mounting beneath the edge,  
the luminaire does not withstand heavy rainfall. Typically a  
height difference of 0,5 times the roof overhang compared  
to the luminaire should not be exceeded.

*The right of error and later technical developments is reserved. 15.07.2024*

Values may be extrapolated differently from TM21.

